

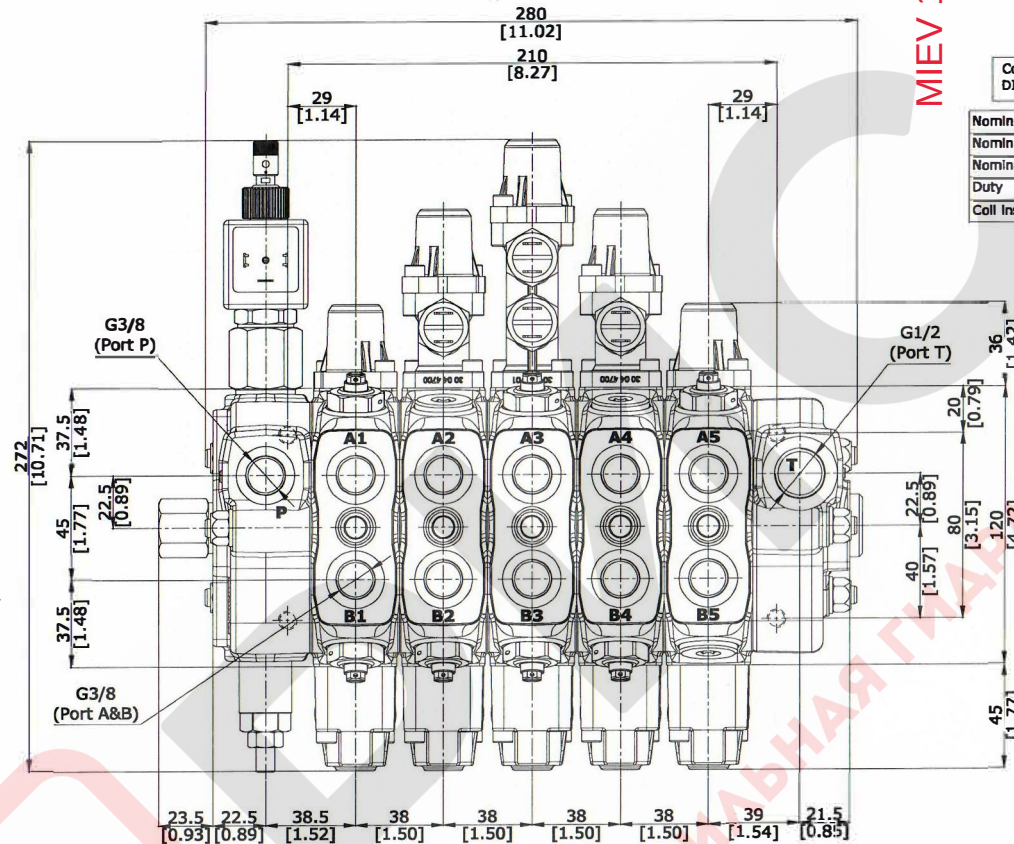
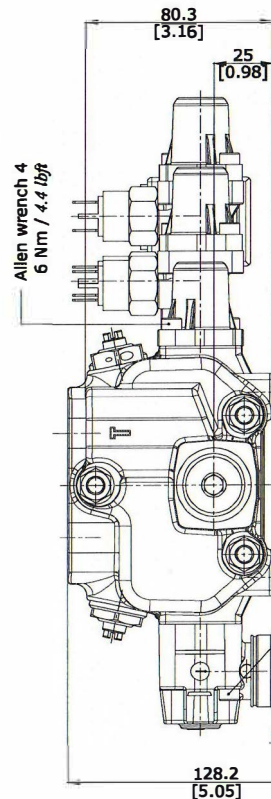



MIEV 189




Connector	DIN43650/ISO4400
Nominal voltage	24 VDC
Nominal Power	22 W
Nominal Current	1.6 A
Duty	100%
Coil Insulation	Class H

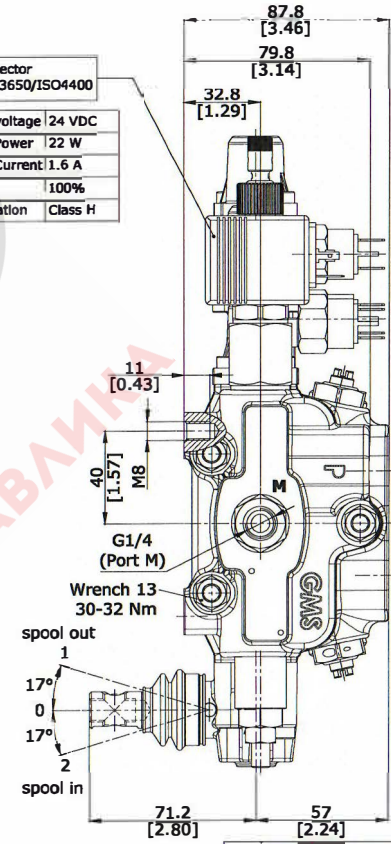

ISOMETRIC VIEW

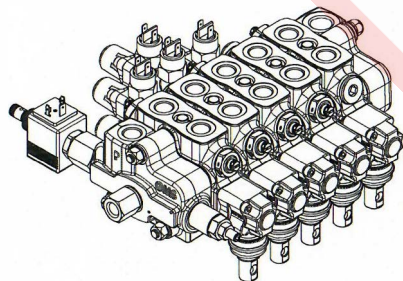

HYDRAULIC CIRCUIT

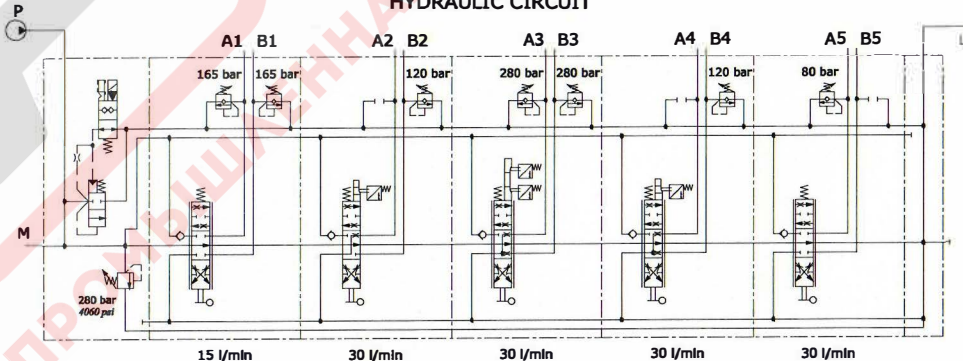

Rev. No.	Rev. Date	Description
1	13.09.2022	BLT(W) unimetric BLT(W) clark series valv.
WORKING CONDITIONS		
Nominal Flow	30 l/min.	
Max. Flow	60 l	
Max. Operation Pressure	350 bar	
Max. Back Pressure (T)	20 bar	
P-A-B-C Working Pressure	320 bar	
Hydraulic fluid	Mineral base oil	
Viscosity range	from 12 to 400 mm²/s	
Seal material	NRK	
Fluid Temperature		
with NRK seals	from - 40° to 80°C	
with FPM seals	from - 40° to 100°C	
Max. level of contamination	15/15 - ISO 4406	
Internal Leakage	50 ml / min. at 100 bar	
	30 ml / s (32/25) at - 40 °C	
Port Size		
Inlet P	G3/8	
A and B ports	G3/8	
Outlet T	G1/2	
Color	-	
ELECTRICAL FEATURES		
Voltage	24 VDC +/- 10%	
Duty	100%	

GURMAKSAN
hydraulic

e-mail: info@gurmaksan.com.tr
<http://www.gurmaksan.com.tr>
ISTANBUL - TURKEY

GLTOLERANCE	±0.1	REVIZION NR. 30
MATERIAL	-	ALL RIGHTS RESERVED
DRAWING	2T	DATE
DATE	13.09.2022	BY
DATE	13.09.2022	BY

TECHNICAL REFERENCE

50050020 (MIEV 189)

SCALE: 1:1

DRAWING NR. 2022.310