
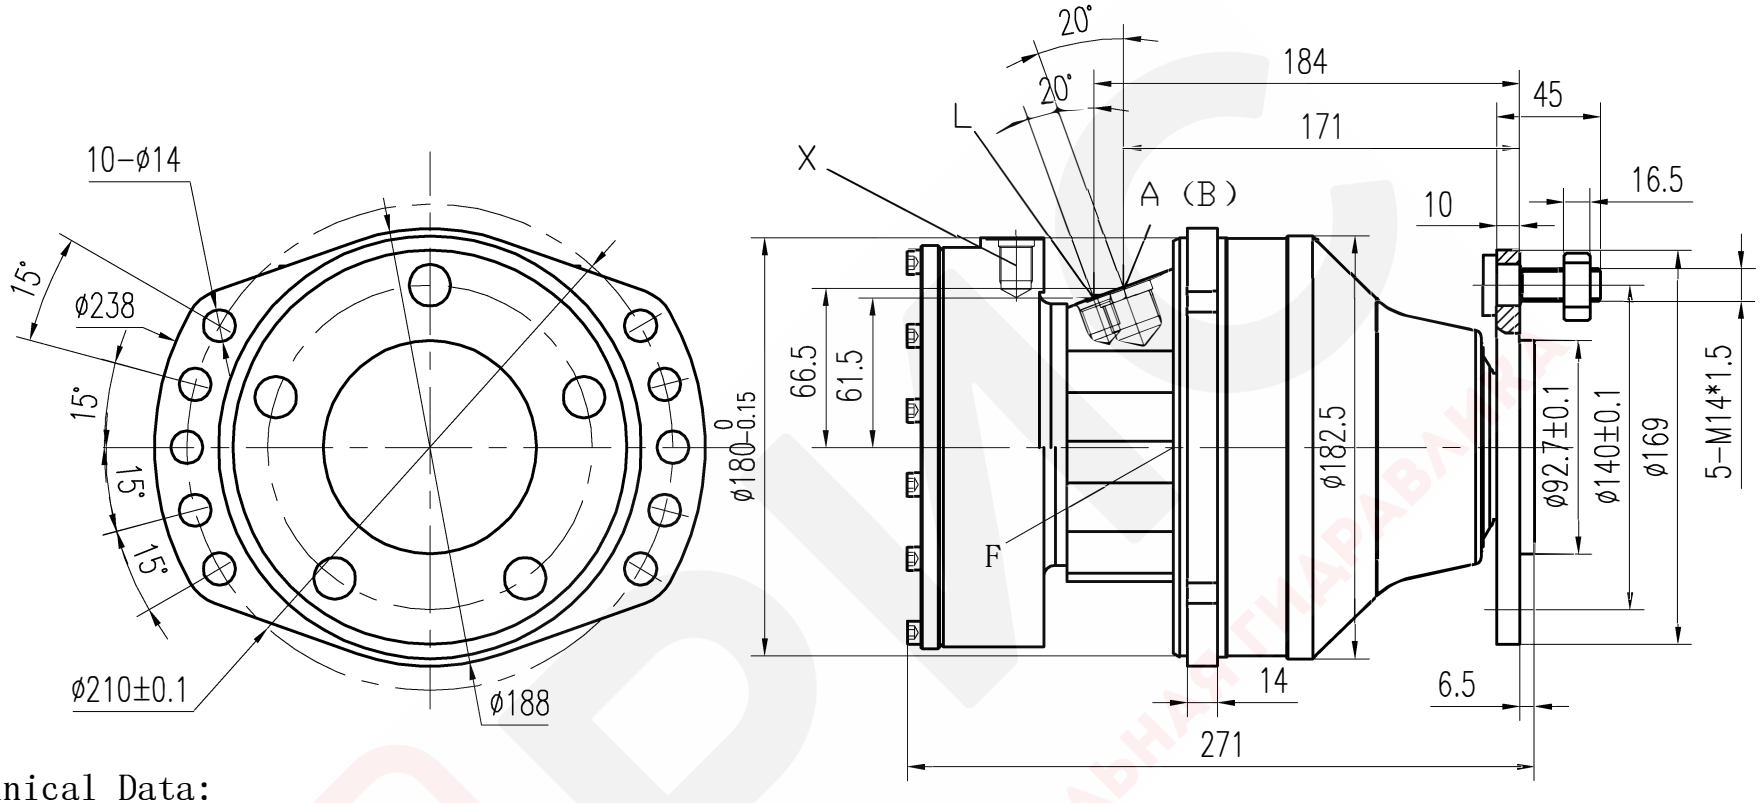


Technical Data:

Displacement	250 ml/r
Max power	16 kW
Rated pressure	25 MPa
Max pressure	35 MPa
Rated torque (25MPa)	964 N.m
Rated speed	100 rpm
Speed range	0-250 rpm
Brake torque	2500 N.m
Brake release pressure (min)	1.2 MPa
Brake release pressure (max)	3 MPa
Brake bearing pressure	5 MPa

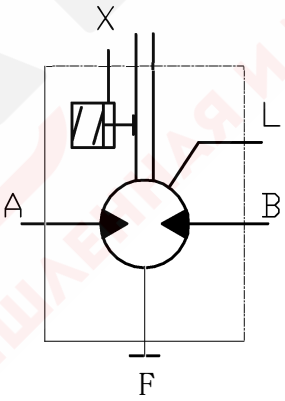

Port		
A	Port A pressurized-cw	BSPP1/2"
B	Port B pressurized-ccw	BSPP1/2"
L	Drain portsL	BSPP3/8"
F	Drain portsF	BSPP3/8"
X	Brake ports	BSPP3/8"

АРИС
ПРОМЫШЛЕННАЯ И МОБИЛЬНАЯ ГИДРАВЛИКА

TMS03-250-L12-M-Y-Z05

ПРОМЫШЛЕННАЯ И МОБИЛЬНАЯ ГИДРАВЛИКА